


РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ

ФЛАНЕЦ ПЛОСКИЙ

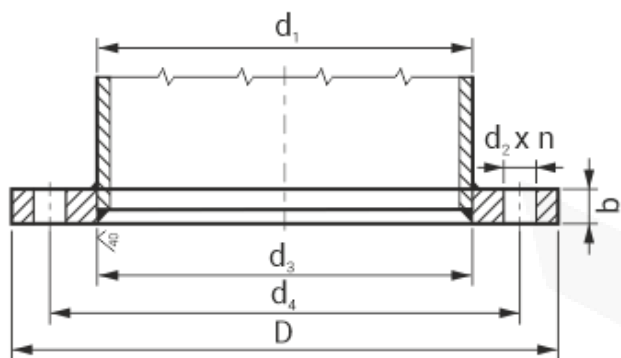


Производственный стандарт: **DIN 2576**

Размерный стандарт: **ISO**

Номинальное давление: **10 бар**

DN	d1	d3	D	d4	d2	n	b	вес, кг
10	17.2	17.7	90	60	14	4	14	0.605
15	21.3	22.0	95	65	14	4	14	0.669
20	26.9	27.6	105	75	14	4	16	0.936
25	33.7	34.4	115	85	14	4	16	1.11
32	42.4	43.1	140	100	18	4	16	1.62
40	48.3	49.0	150	110	18	4	16	1.86
50	60.3	61.1	165	125	18	4	18	2.47
65	76.1	77.1	185	145	18	4	18	3.0
80	88.9	90.3	200	160	18	8	20	3.79
100	114.3	115.9	220	180	18	8	20	4.03
125	139.7	141.6	250	210	18	8	22	5.46
150	168.3	170.5	285	240	22	8	22	6.57
200	219.1	221.8	340	295	22	8	24	9.31
250	273.0	276.2	395	350	22	12	26	11.9
300	323.9	327.6	445	400	22	12	26	13.8
350	355.6	359.7	505	460	22	16	28	20.6
400	406.4	411.0	565	515	26	16	32	27.9
500	508.0	513.6	670	620	26	20	38	41.1

ФЛАНЕЦ ПЛОСКИЙ

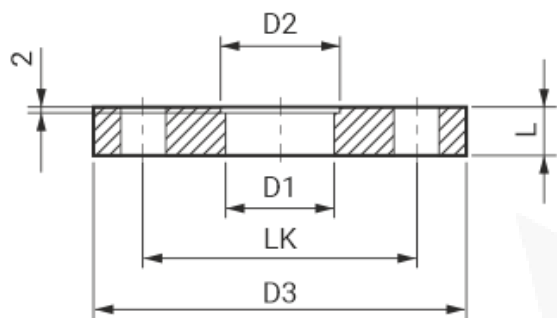


Производственный стандарт: EN 1092

Размерный стандарт: DIN

Номинальное давление: 10 бар

DN	D1	D2	D3	L	LK	вес, кг
10	10	12.2	90	14	60 (4/M12x45)	0.50
10	10	13.2	90	14	60 (4/M12x45)	0.50
15	16	18.2	95	14	65 (4/M12x45)	0.60
15	16	19.2	95	14	65 (4/M12x45)	0.60
20	20	22.2	105	14	75 (4/M12x45)	0.85
20	20	23.2	105	14	75 (4/M12x45)	0.85
25	26	28.2	115	14	85 (4/M12x45)	1.11
25	26	29.2	115	14	85 (4/M12x45)	1.11
32	32	34.2	140	14	100 (4/M16x50)	1.64
32	32	35.2	140	14	100 (4/M16x50)	1.64
40	38	40.2	150	14	110 (4/M16x50)	1.80
40	38	41.2	150	14	110 (4/M16x50)	1.80
50	50	52.2	165	14	125 (4/M16x50)	2.30
50	50	53.2	165	14	125 (4/M16x50)	2.30
65	66	70.5	185	14	145 (4/M16x50)	2.88
80	81	85.5	200	16	160 (8/M16x55)	3.20
100	100	104.5	220	16	180 (8/M16x55)	4.00
125	125	129.5	250	20	210 (8/M16x65)	5.00
150	150	154.5	285	20	240 (8/M20x65)	6.70
200	200	205.0	340	24	295 (8/M20x75)	9.00

ФЛАНЕЦ ПЛОСКИЙ

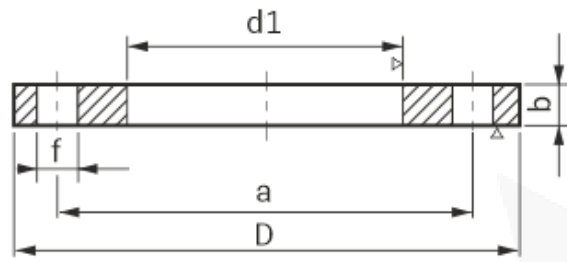


Производственный стандарт: DIN 2577

Размерный стандарт: ISO

Номинальное давление: 16 бар

DN	Ø трубы	d1	A	D	b	f	резьба	кол-во отверстий	вес, кг
10	17.2	17.5	60	90	12	14	M12	4	0.52
15	21.3	22	65	95	12	14	M12	4	0.66
20	26.9	27.5	75	105	14	14	M12	4	0.82
25	33.7	34	85	115	14	14	M12	4	1.01
32	42.4	43	100	140	16	18	M16	4	1.63
40	48.3	49	110	150	16	18	M16	4	1.85
50	57	57.8	125	165	18	18	M16	4	2.46
	60,3	61,5							
65	76.1	77	145	185	18	18	M16	4	3
80	88.9	90	160	200	20	18	M16	8	3.61
100	108	109	180	220	22	18	M16	8	4.4
	114.3	115							
125	133	134.5	210	250	24	18	M16	8	5.92
	139.7	141							
150	159	170.5	240	285	24	22	M20	8	7.17
	168.3	170							
200	219.1	221	295	340	26	22	M20	12	9.77

ФЛАНЕЦ ПЛОСКИЙ

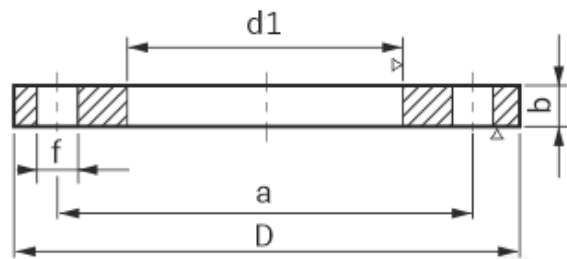


Производственный стандарт: **DIN 2577**

Размерный стандарт: **ISO**

Номинальное давление: **16 бар**

DN	Ø трубы	d1	a	D	b	f	резьба	кол-во отверстий	вес, кг
250	273	275	355	405	29	26	M22	12	16
300	323.9	326	410	460	32	26	M22	12	19.3
350	355.6	358	470	520	36	26	M22	16	29.4
400	406.4	409	525	580	38	30	M27	16	36.5
450	457.2	460.2	585	640	40	30	M27	20	42
500	508	511	650	715	42	33	M30	20	59
600	609.6	612.6	770	840	44	36	M33	20	70
700	711.2	714.2	840	910	46	36	M33	24	88
800	812.8	815.8	950	1025	48	39	M36X3	24	115
900	914.4	917.4	1050	1125	50	39	M36X3	28	125
1000	1016	1019	1170	1255	50	42	M39X3	28	160
1100	1120	1124	1270	1355	50	42	M39	32	
1200	1220	1224	1390	1485	52	48	M45	32	
1300	1320	1324	1490	1585	52	48	M45	32	
1400	1420	1424	1590	1685	54	48	M45	36	
1500	1520	1524	1710	1820	54	56	M52	36	
1600	1620	1624	1820	1930	56	56	M52	40	
1800	1820	1824	2020	2130	58	56	M52	44	
2000	2020	2024	2230	2345	60	62	M56	52	

ФЛАНЕЦ ПЛОСКИЙ

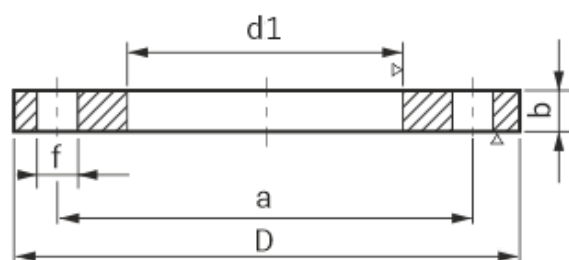

Производственный стандарт: EN 1092

Размерный стандарт: DIN

Номинальное давление: 16 бар

DN	Ø трубы	D	a	d1	b	f	кол-во отверстий	вес. кг
50	54	165	125	55.2	18	18	4	2.5
65	70	185	145	71.5	18	18	4	2.9
80	84	200	160	85.5	20	18	8	3.6
100	104	220	180	105.5	20	18	8	4.5
125	129	250	210	130.8	22	18	8	4.8
150	154	285	240	156	22	22	8	7.2
200	204	340	295	206	26	22	12	9.8
250	254	405	355	257	29	26	12	16
300	304	460	410	307.5	32	26	12	20